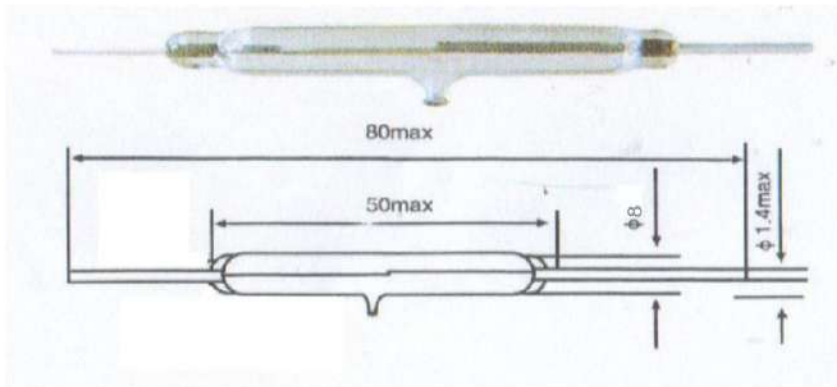

REED SWITCHES

LRSW-TSB-8X50-C3-60 (AT 50-60)

3A, 250VDC, 280W,
8 x 50 mm, White Glass Reed Switch,
Silver terminal, SPDT (3PIN NO/NC)

Reed Switch Specification



Contact Form		SPST-NO
Max. Contact Rating	W	280
Max. Switching Voltage	VDC	250
Breakdown Voltage	VDC	3000-10000
Max. Switching Current	A	3.0
Max. Carry Current	A	
Max. Initial Contact Resistance	MΩ	≤200
Min. Insulation Resistance	Ω	10 ⁹
Operating time	ms	≤1
Bounce time	ms	≤0.8
Release time	ms	≤0.3
Resonant Frequency	Hz	
Max. Operating Frequency	Hz	100
Pull in Value	AT	120 - 330
Min. Drop out Value	FT	≥60
Max. Contact Capacitance	PF	0.35
Electrical Life Resistive Loads	Fq	1x10 ⁶ (250VDC, 1A)
Test Coll Number of turns Resistance	Ω	